


1 Resistor - Weerstand - Résistance - Widerstand - Resistencia - Motstånd - Vastus - Resistenze
◇ R1 ... R5 : 10K



(Brown, Black, Orange) - (Bruin, Zwart, Oranje) - (Brun, noir, Orange) - (Braun, Schwarz, Orange) - (Brun, Svart, Orange) - (Ruskea, Musta, Oranssi) - (Marrón, Negro, Naranjado) - (Castanho, Preto, Laranja) - (Marrone, Nero, Aranciato)

2


DIODE



◇ D1 : BAT85
◇ D2 : BAT85

3


CAPACITOR



◇ C2 : 100nF (104)
◇ C3 : 100nF (104)

4

IC SOCKET

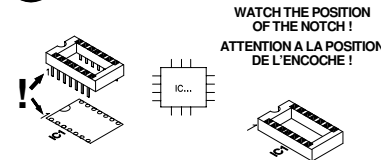


◇ IC1 : 14p

WATCH THE POSITION OF THE NOTCH !
ATTENTION A LA POSITION DE L'ENCOCHE !

10


BATTERY HOLDER

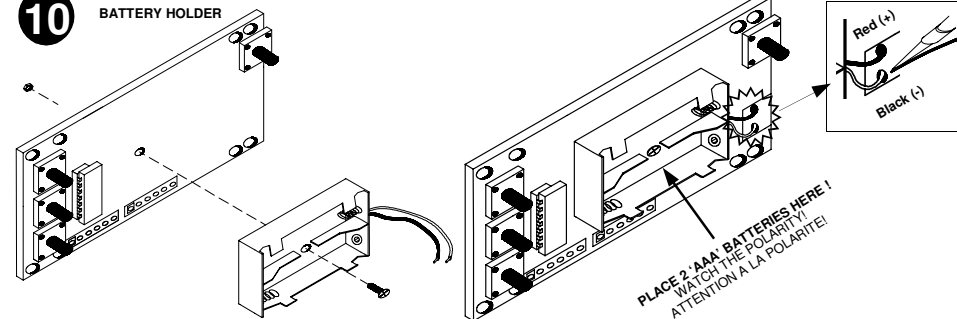

PLACE 2 'AAA' BATTERIES HERE !
WATCH THE POLARITY !
ATTENTION A LA POLARITE !


11

LCD DISPLAY

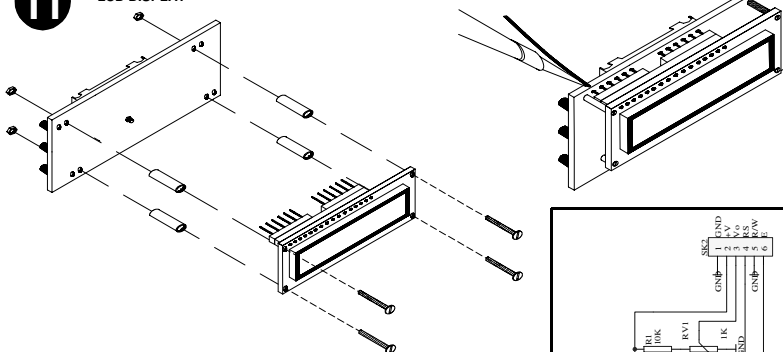

12

IC




WATCH THE POSITION OF THE NOTCH !
ATTENTION A LA POSITION DE L'ENCOCHE !

◇ IC1 : PIC16C505

8


FEMALE CONNECTOR

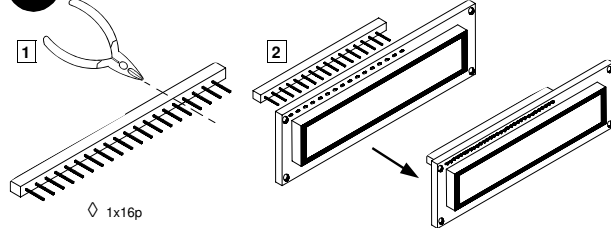

◇ 1x16p

9

MALE CONNECTOR

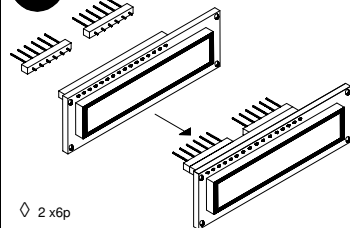

◇ 2 x6p

Press 'ENTER' to enable unit
Press and hold 'ENTER' to 'enter menu'.

Choose from menu with 'UP' key
Confirm with 'ENTER'

In 'EDIT'-mode select char with UP/DOWN/SPACE
Confirm with 'ENTER'
Press 'ENTER' and 'DOWN' to leave 'EDIT'-mode
In 'SET SPEED'-mode set speed with UP/DOWN

